

Standard Gain Horn Antenna
25dBi Typ. Gain, 75-110 GHz Frequency Range

Standard Gain Horn Antenna Data Sheet

RM-SGHA10-25

Features


- Wave-guide and Connector Interface
- Low Side-lobe
- Linear Polarization
- High Return Loss

Descriptions

RF MISO's **Model RM-SGHA10-25** is a linear polarized standard gain horn antenna that operates from 75 to 110 GHz. The antenna offers a typical gain of 25 dBi and low VSWR 1.1:1. This antenna has flange input and coaxial input for customers to rotate.

Specifications


RM-SGHA10-25		
Parameters	Specification	Unit
Frequency Range	75-110	GHz
Wave-guide	WR10	
Gain	25 Typ.	dBi
VSWR	1.1 Typ.	
Polarization	Linear	
Cross Polarization Isolation	50	dB
Material	Cu	
Finishing	Gold Plate	
C Type Size(L*W*H)	82.5*26.09*33.68(±5)	mm
Weight	0.03	kg



Standard Gain Horn Antenna Data Sheet


RM-SGHA10-25


Outline Drawing

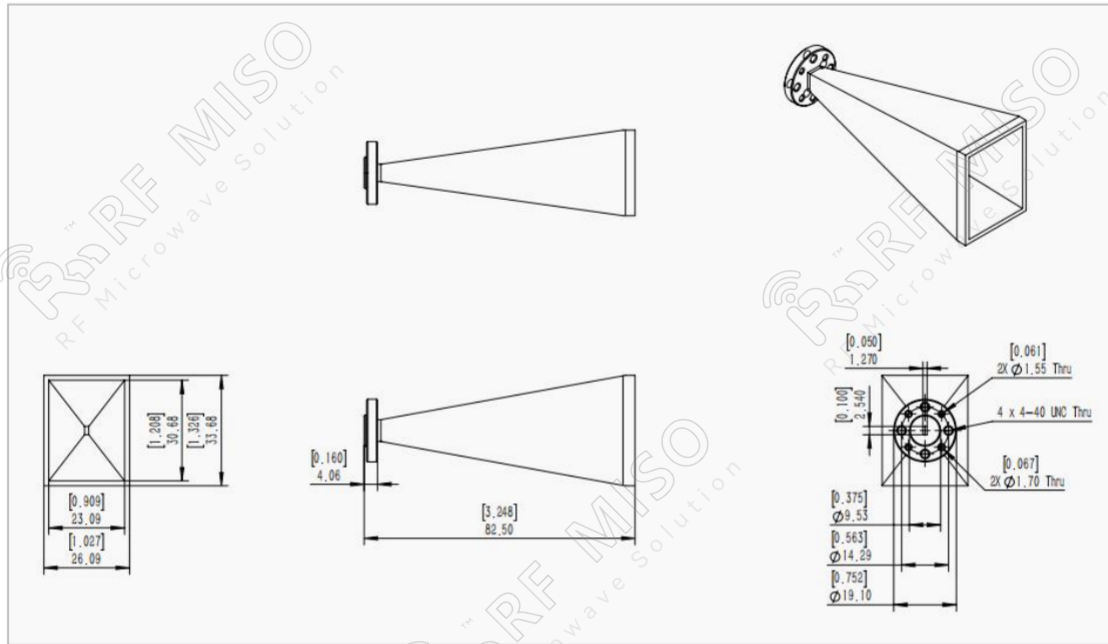

Simulation Result

VSWR

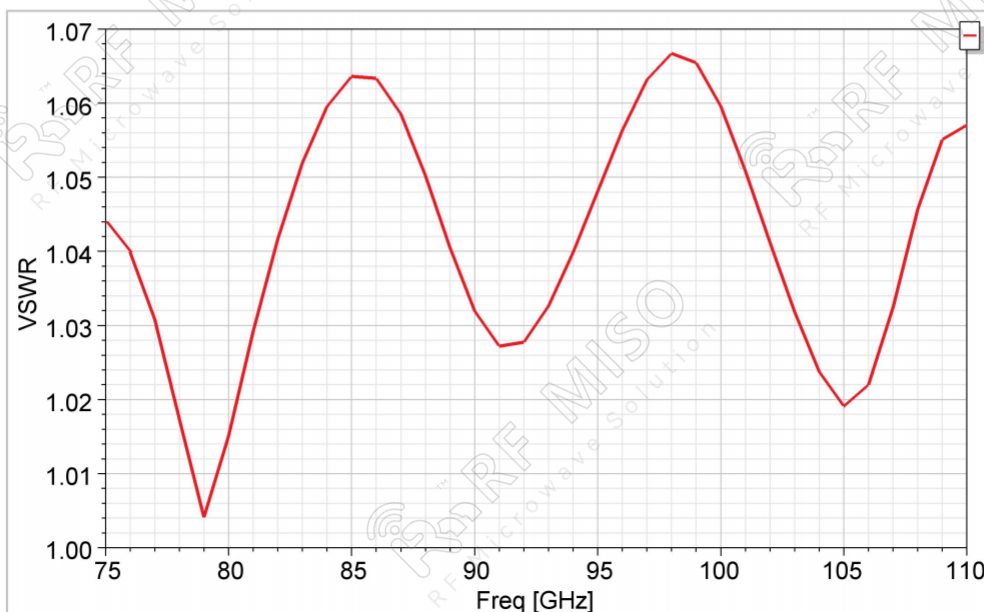




Standard Gain Horn Antenna
25dBi Typ. Gain, 75-110 GHz Frequency Range


Standard Gain Horn Antenna Data Sheet


RM-SGHA10-25

Gain

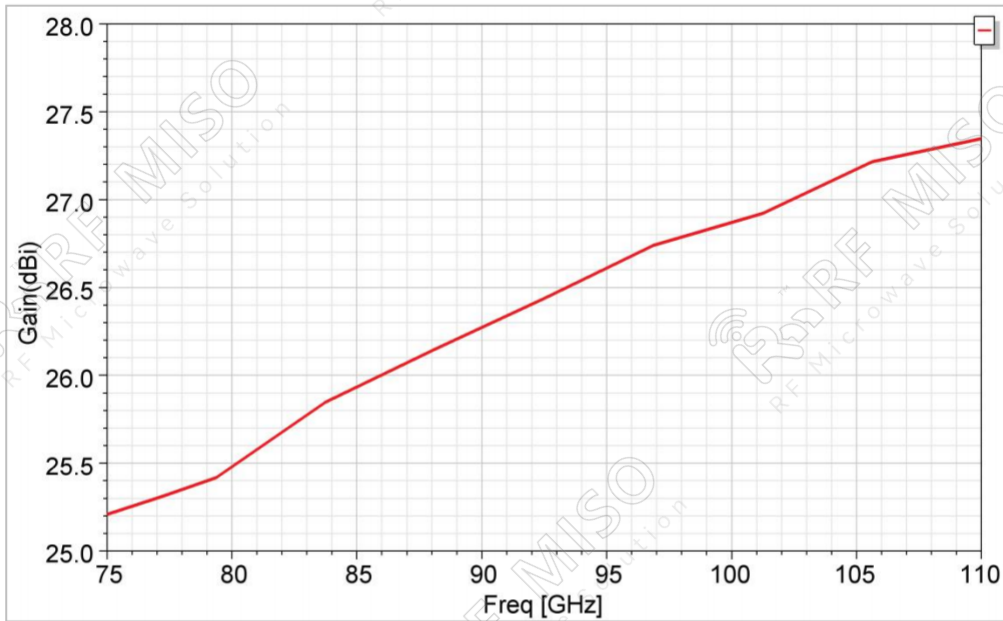

Cross Polarization (dB)

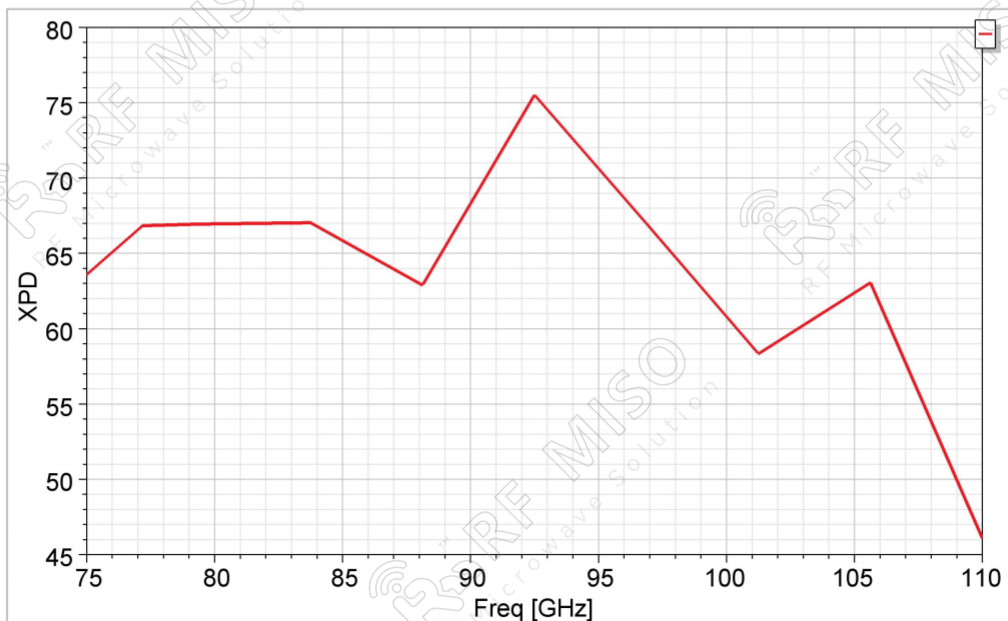




Standard Gain Horn Antenna
25dBi Typ. Gain, 75-110 GHz Frequency Range

Standard Gain Horn Antenna Data Sheet


RM-SGHA10-25


Gain Pattern

75GHz

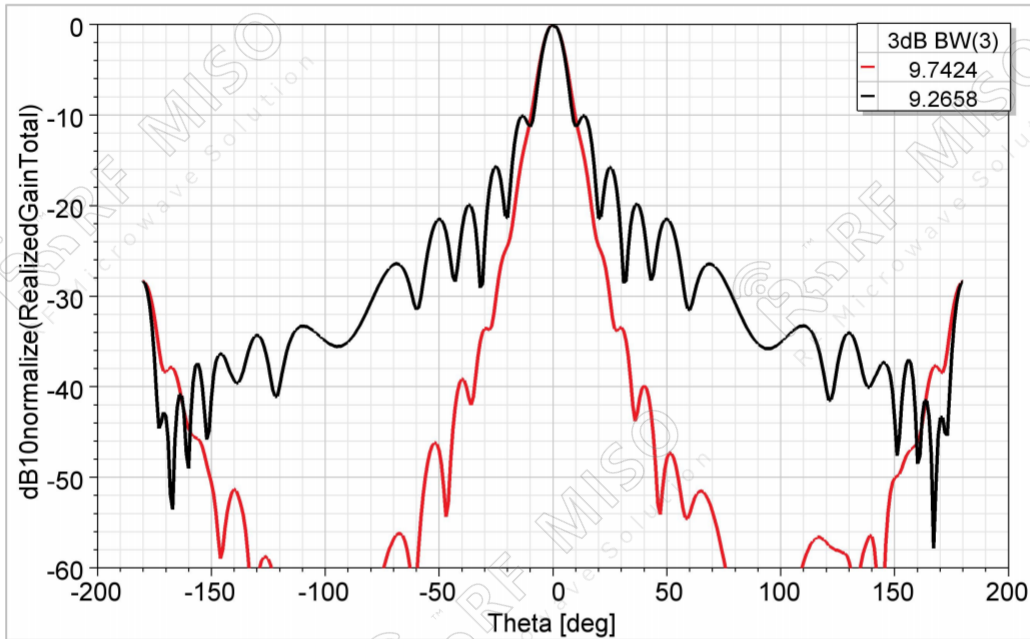

92.5GHz

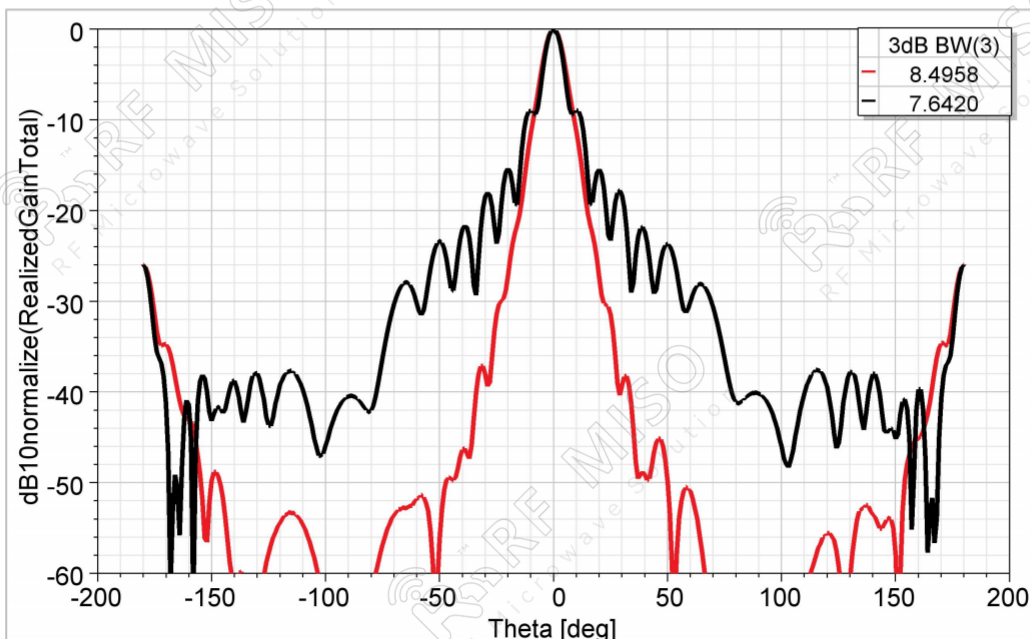



Standard Gain Horn Antenna
25dBi Typ. Gain, 75-110 GHz Frequency Range

Standard Gain Horn Antenna Data Sheet

RM-SGHA10-25

110GHz

