

Standard Gain Horn Antenna
15dBi Typ. Gain, 2.60-3.95 GHz Frequency Range

Standard Gain Horn Antenna Data Sheet

RM-SGHA284-15

Features

- Wave-guide and Connector Interface
- Low Side-lobe
- Linear Polarization
- High Return Loss

Descriptions

RF MISO's **Model RM-SGHA284-15** is a linear polarized standard gain horn antenna that operates from 2.60 to 3.95 GHz. The antenna offers a typical gain of 15 dBi and low VSWR 1.3:1. The antenna has a typical 3dB beamwidth of 32 degrees on the E plane and 31 degrees on H plane. This antenna has flange input and coaxial input for customers to rotate. Antenna mounting brackets include ordinary L-type and I-type mounting bracket.

Specifications


Parameters	Specification		Unit
Frequency Range	2.60-3.95		GHz
Wave-guide	WR284		
Gain	15 Typ.		dBi
VSWR	1.3 Typ.		
Polarization	Linear		
3 dB Beamwidth, E-Plane	32° Typ.		
3 dB Beamwidth, H-Plane	31° Typ.		
Interface	FDP32(F Type)	N-Female(C Type)	
Material	Al		
Finishing	Paint		
Size,C Type (L*W*H)	326.6*199.7*144.8 (±5)		mm
Weight	0.697(F Type)	1.168(C Type)	kg
C Type Average Power	150		w
C Type Peak Power	3000		w
Operating Temperature	-40° ~+85°		° C

Standard Gain Horn Antenna
15dBi Typ. Gain, 2.60-3.95 GHz Frequency Range

Standard Gain Horn Antenna Data Sheet


RM-SGHA284-15

F-Type Mechanical Drawing (P/N: RM-SGHA284-15F)

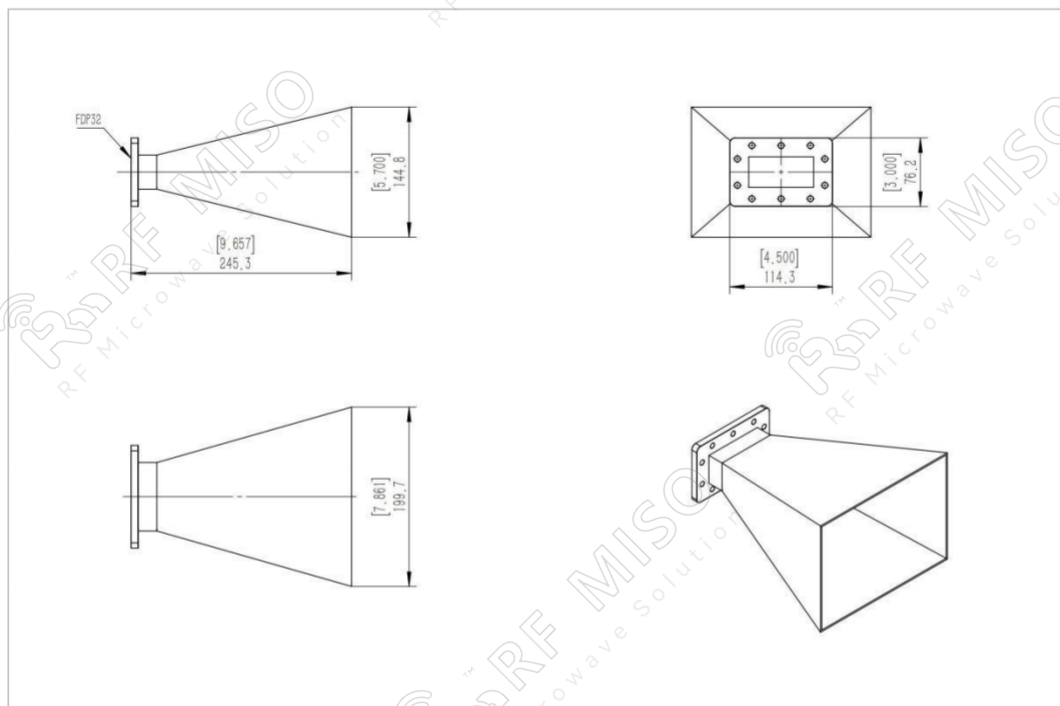


C-Type Mechanical Drawing (P/N: RM-SGHA284-15C)

SMA connector is available, please contact RF Miso.

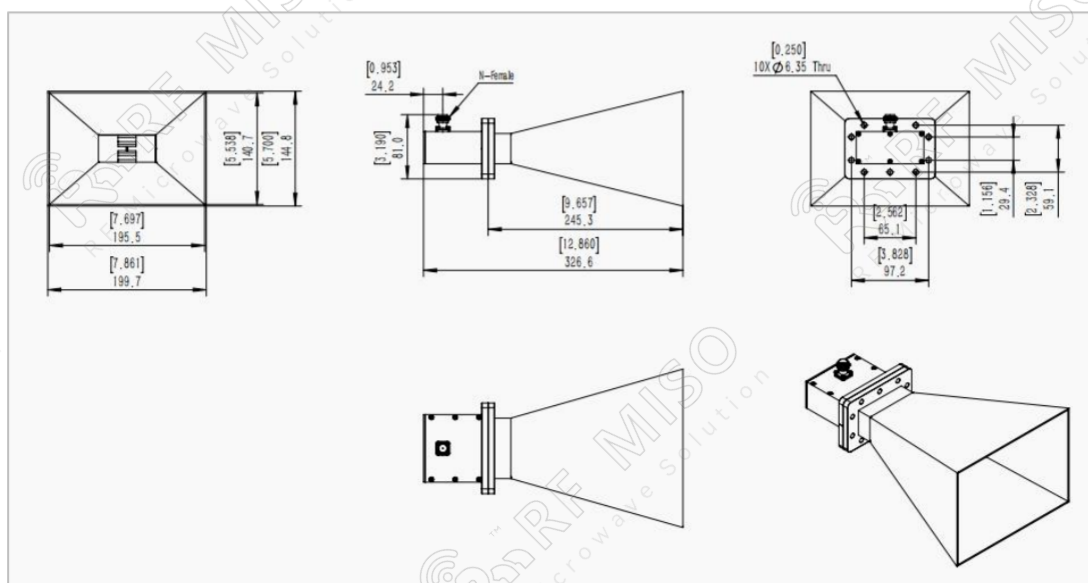


Standard Gain Horn Antenna
15dBi Typ. Gain, 2.60-3.95 GHz Frequency Range




Standard Gain Horn Antenna Data Sheet


RM-SGHA284-15

Mechanical Drawing with Ordinary L-type Mounting Bracket (P/N: RM-SGHA284-15CL)

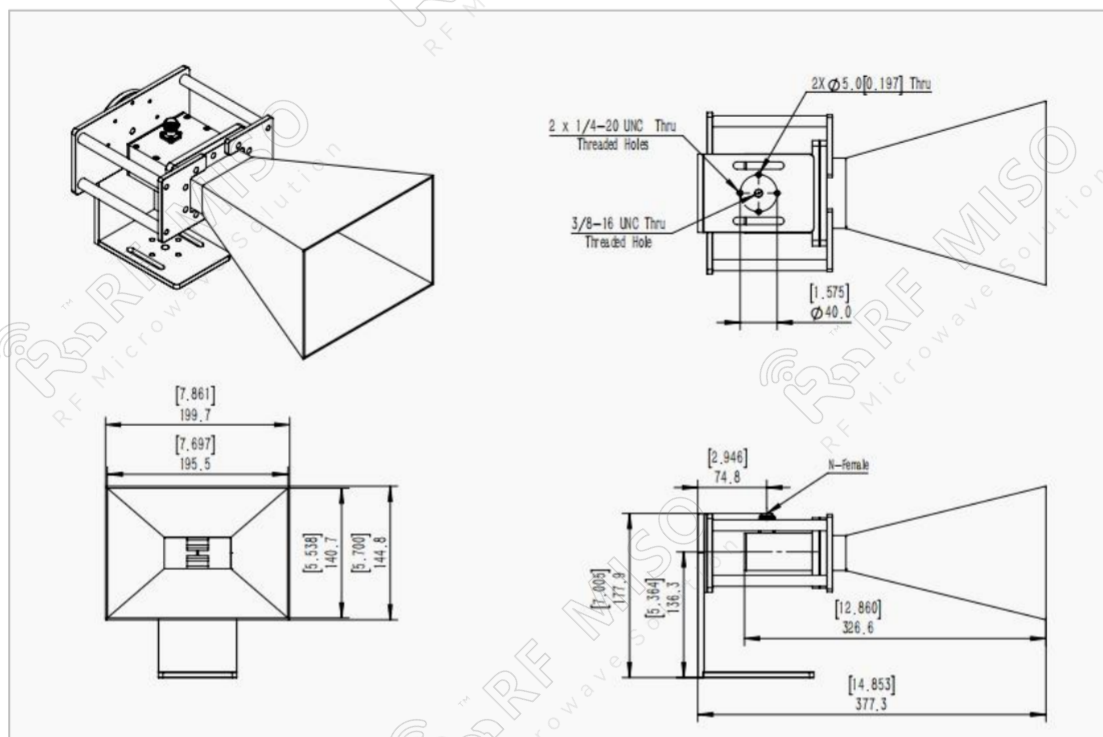

Mechanical Drawing with Ordinary I-type Mounting Bracket (P/N: RM-SGHA284-15CI)

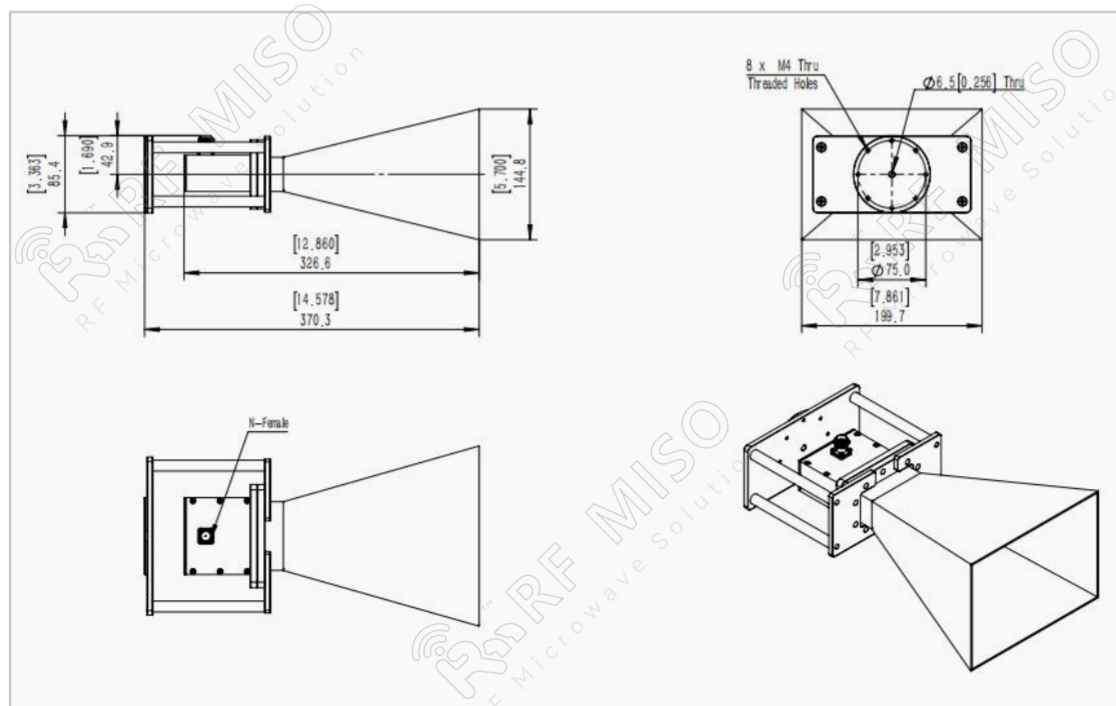




Standard Gain Horn Antenna
15dBi Typ. Gain, 2.60-3.95 GHz Frequency Range

Standard Gain Horn Antenna Data Sheet


RM-SGHA284-15


Mechanical Drawing with Rotating L-type Mounting Bracket (P/N: RM-SGHA284-15CR)

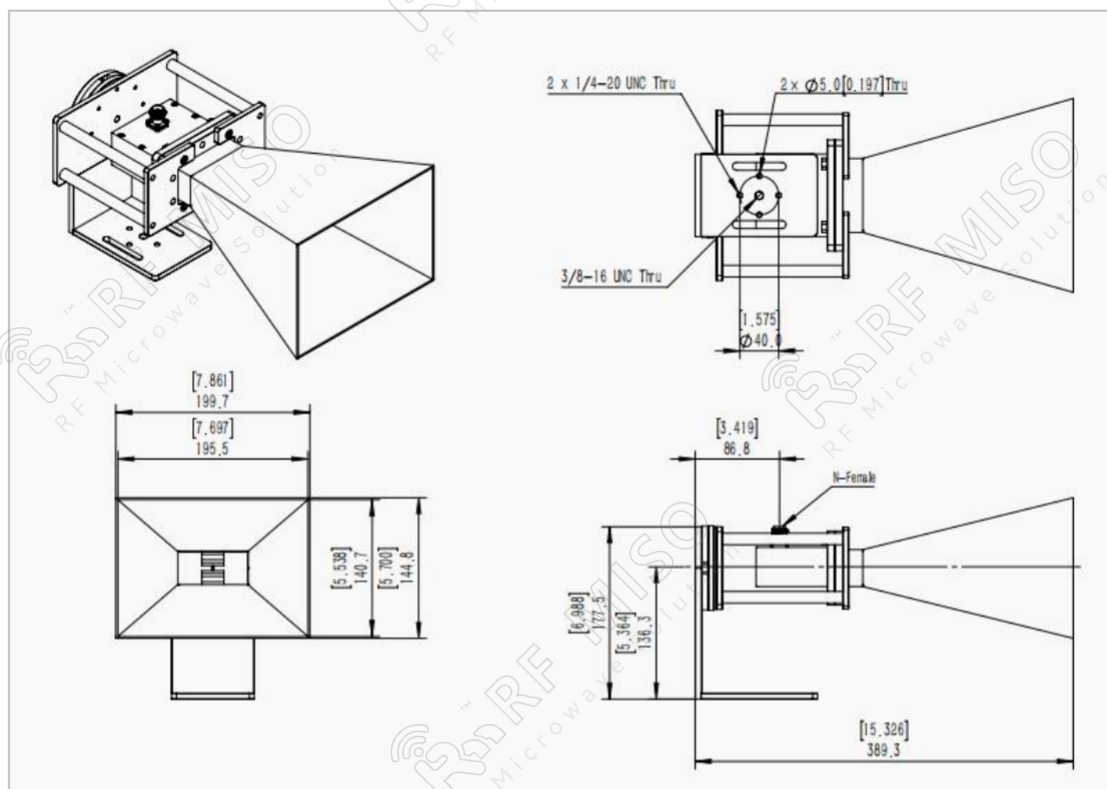

Simulation Data

VSWR

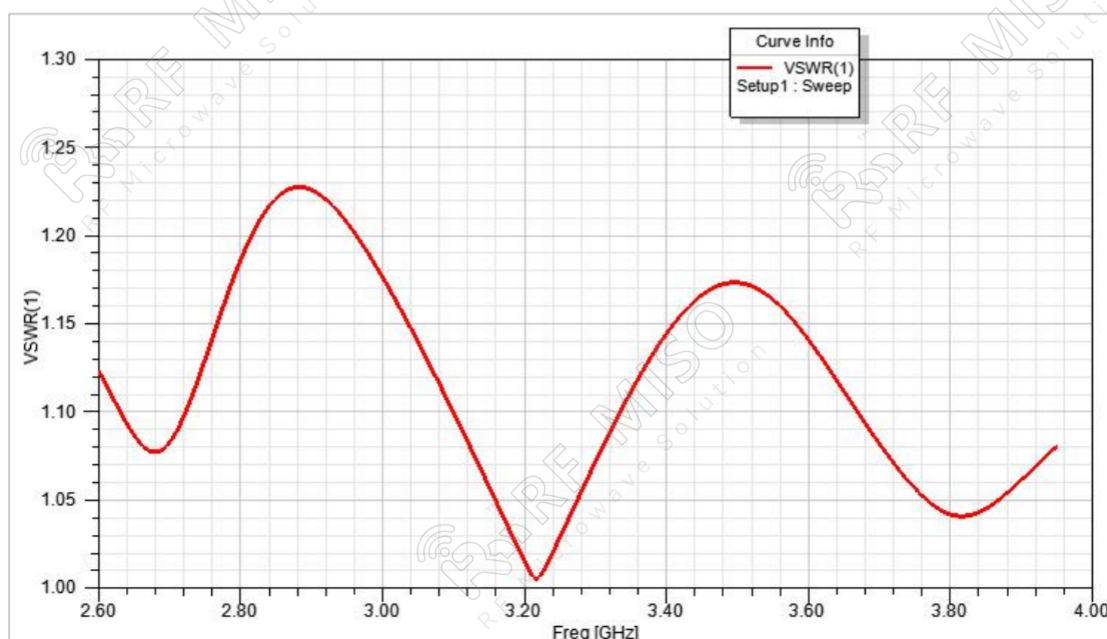




Standard Gain Horn Antenna
15dBi Typ. Gain, 2.60-3.95 GHz Frequency Range


Standard Gain Horn Antenna Data Sheet


RM-SGHA284-15

Gain

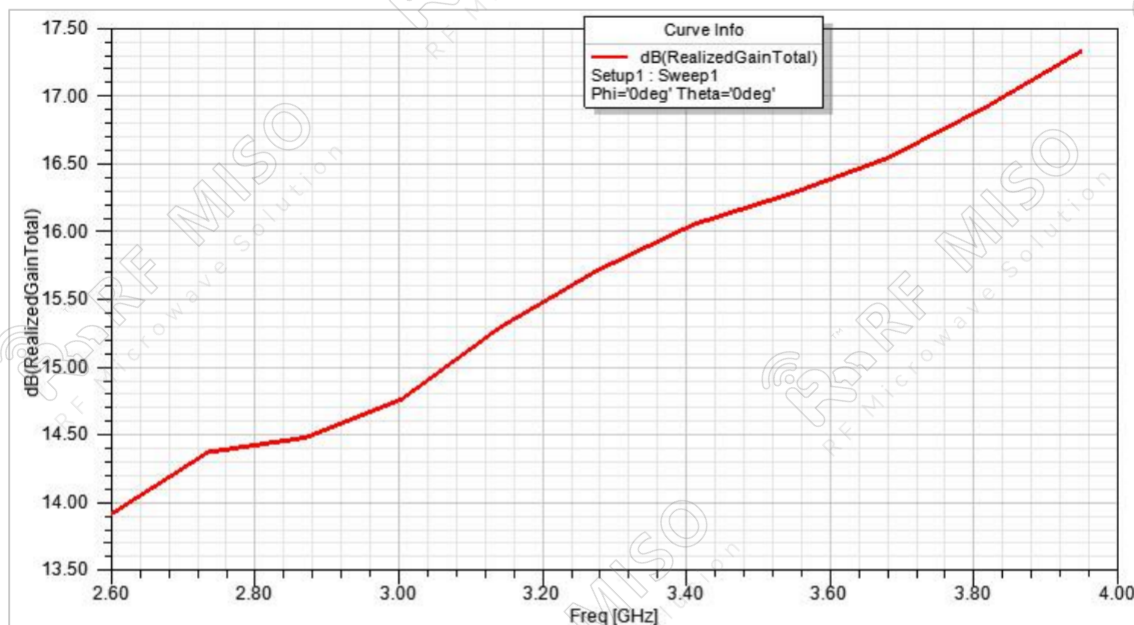

Gain Pattern E-plane

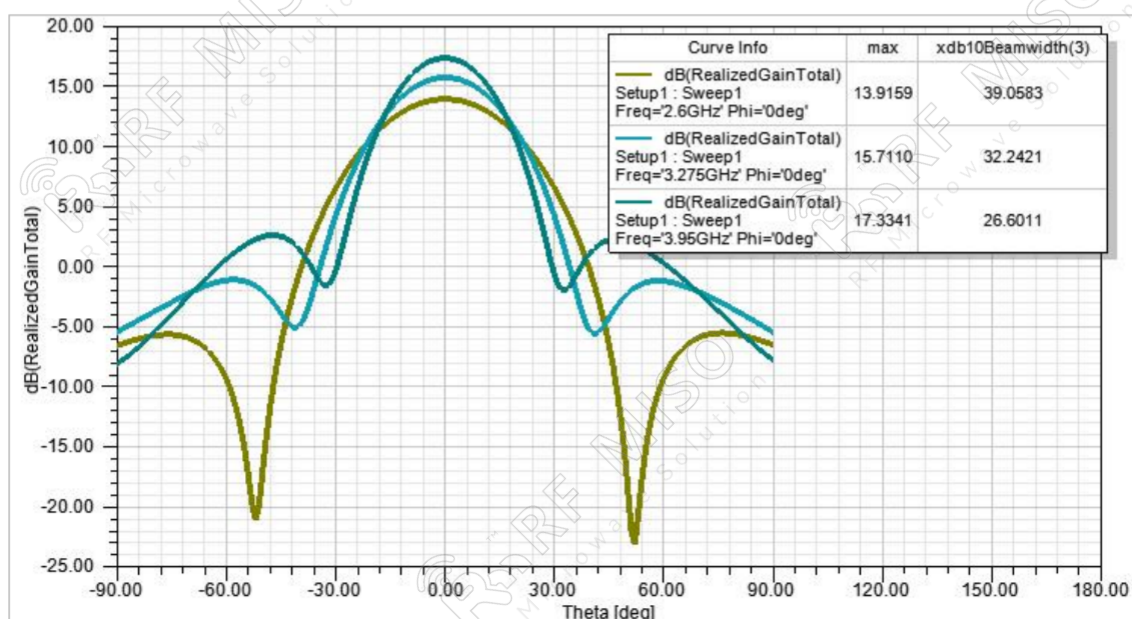




Standard Gain Horn Antenna
15dBi Typ. Gain, 2.60-3.95 GHz Frequency Range

Standard Gain Horn Antenna Data Sheet

RM-SGHA284-15

Gain Pattern H-plane

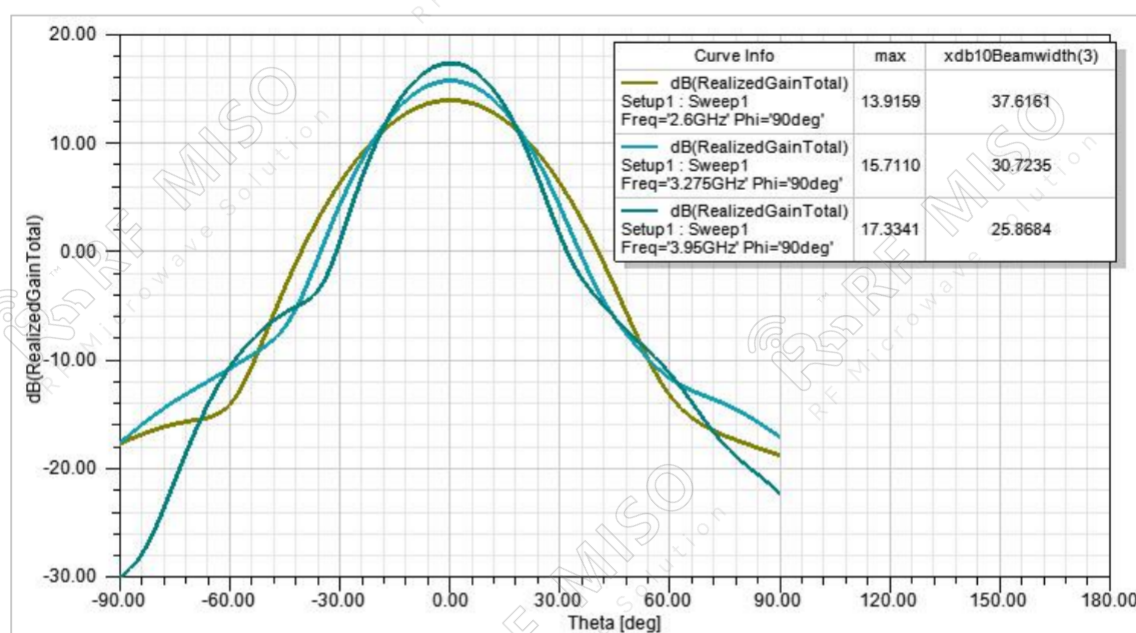

Note:

- If the data presented is simulated. Actual data may vary unit to unit, slightly.
- Any foreign objects in the wave-guide will cause performance degradation and possible device damage.
- We can customize antennas according to your specific needs.